

# Enhanced performance solution for Surface cleaning applications

**ProTwin's** State of the art, revolutionary hydraulics sets a new industry standard of performance and reliability. Available as stand alone or as a complete kit, ProTwin supplies the best results with the lowest effort, all included in a clean simple design.

## Main Unit:

- Big easy to use single dial
- Easy, intuitive, large icons
- Removable included hose holder
- Cut off inlet valve for end of work shift
- Available as complete kit or as single components
- Customizable

## Hose:

- High temperature and pressure resistance, great reliability and durability, anti-scuff

## Gun:


- Light, easy to handle and use
- Ready to be connected with Foam Wand



Easy to use, light to handle offering consistent and professional results



# Behind the Face

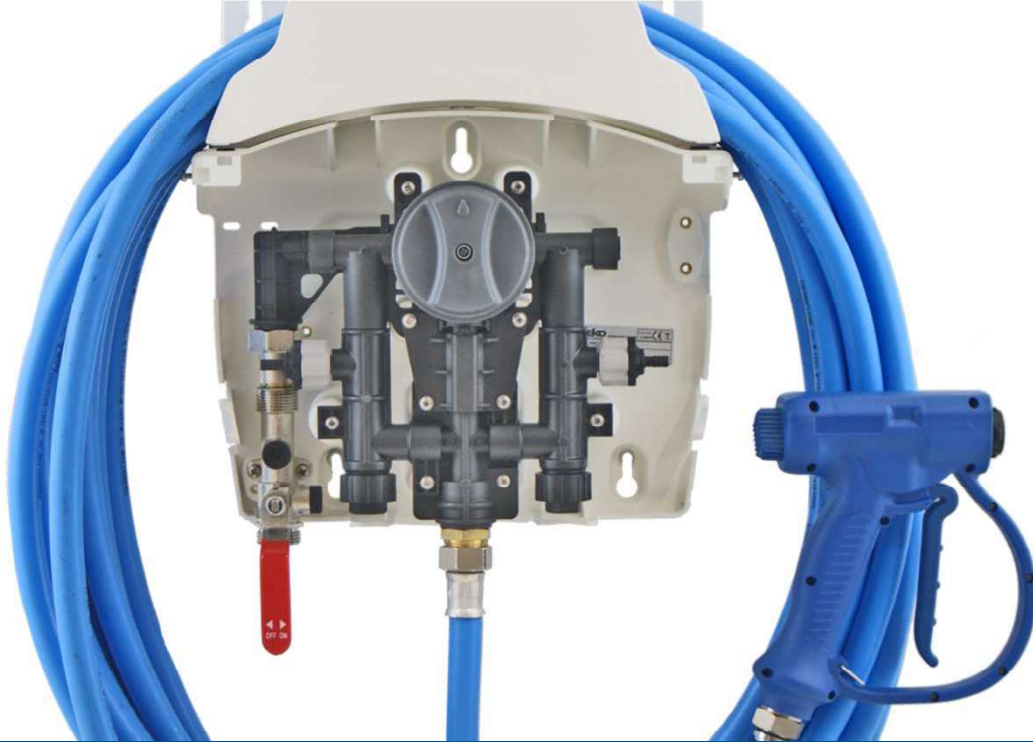

## Inside:

- Independent venturi for each chemical helps prevent cross contamination
- Easy access and maintenance with "fast connect" hydraulics parts
- Anti pollution valve equipped
- Easy replacement of the venturi



**Unscrew the plug and remove it, easy to clean and easy to replace**

## Features

| PERFORMANCE | Pressure | Ratio  | Flowrate l/min | Pressure with BA | Ratio with BA | Flowrate l/min with BA |
|-------------|----------|--------|----------------|------------------|---------------|------------------------|
| Max         | 6Bar     | 4,97:1 | Rinse 13       | 6Bar             | 5,8:1         | Rinse12                |
| Min         | 1Bar     | 509:1  | Product 10     | 1,5Bar           | 552:1         | Product 9              |

- BA antipollution valve available and certified DWGV, Kiwa, Wras, Begaqua, ACSE, ETA to fit each market's legal requirement
- Standard EPDM suction valve with FPM valve spare already in the kit to ensure broad range chemical compatibility
- Robust, durable polypropylene reinforced with fiber-glass case and internal pipework, guarantees optimum chemical compatibility
- Internal double O-ring connection ensures a tight seal
- Easy snap in and out connection to simplify maintenance operations
- 20bar 70C° mechanical and thermal resistant hose, food approved, anti-scuff and multilayered to guarantee flexibility
- 10-15-20mt lengths available
- Easy to handle gun:
  - Ergonomic handle, light weight with swivel connection, guarantees less operator fatigue
  - Easily adjustable spray pattern for optimum washing flexibility
  - Entirely plastic covered to prevent thermal shock
  - Soft case provides bump resistance
  - Ready for foam wand connection
  - Automatic unlocking trigger dips

# Protwin foam kit


## Unsurpassed Foam Performance

Standard ProTwin can be updated with an **optional foam kit** that delivers clinging foam to high level non-flat surfaces

- **Creates rich clinging foam** – simply using tap water and compressed air
- **Complete kit, easy to install** – open the box, simply attach to the ProTwin outlet valve
- **Powerful jet** – provides foam at up to 4 meters
- **2 product system** for all foam and cleaning needs
- **Sold separately** to standard ProTwin



## Features



| PERFORMANCE | Bar  | Ratio                     | Flowrate l/min    | Bar with BA | Ratio with BA            | Flowrate l/min with BA |
|-------------|------|---------------------------|-------------------|-------------|--------------------------|------------------------|
| Max         | 6Bar | Foam 5:1<br>Spray 10:1    | Rinse 8,5         | 6Bar        | Foam 5,2:1<br>Spray 23:1 | Rinse 7,5              |
| Min         | 1Bar | Foam 212:1<br>Spray 317:1 | Foam 4<br>Spray 5 | 2Bar        | Foam 59:1<br>Spray 82:1  | Foam 3,6<br>Spray 4    |

- **Air injected** directly to the end of the hose for the best foam result
- **External regulation**
- **Swivel connection**
- **Water and Air**
- **Straight jet nozzle** up to 4 metres
- **Plastic lance and gun**
- **Multilayer hose**