
Product Code **PM-48G335**

Oil Immersion Heater

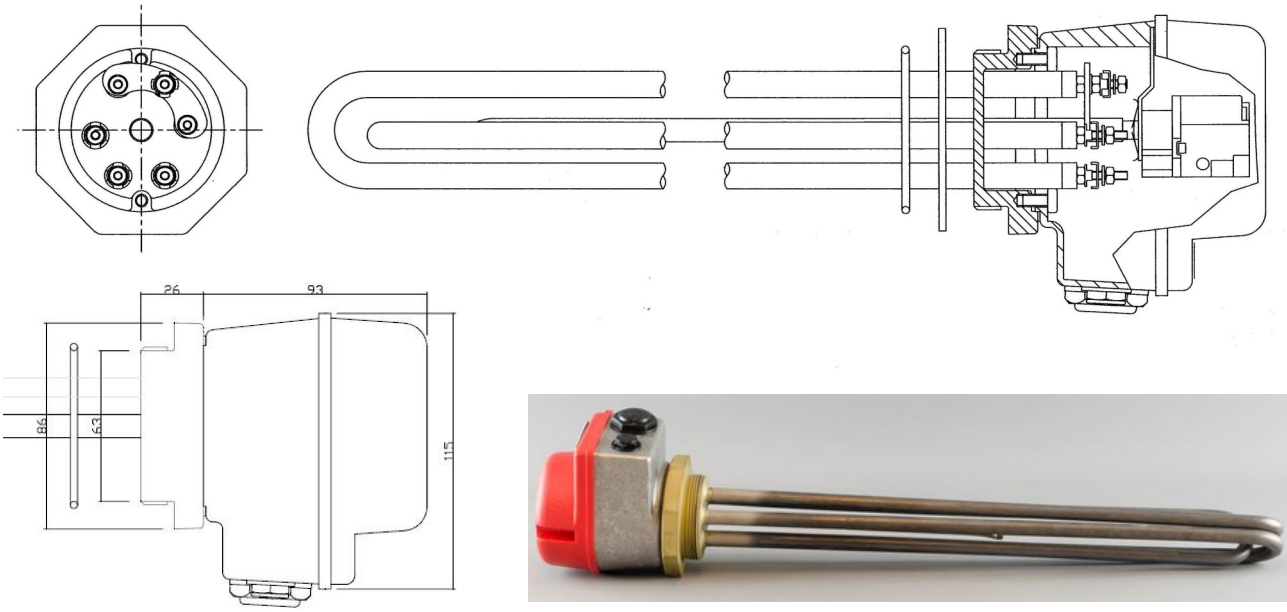

Horizontal Mounting Only

Loading	**1.5 kW 240/415 Star**	**Surface Rating**	**10.7 W/ins² - 1.66 W/cm²**
Immersed Length	**485 mm**	**Fixing**	**2¼"BSP with 86mm AF Oct Nut**

Element Sheath	11mm Diameter Incoloy 800 with 50mm Inactive, Brazed into Gland
Thermostat Pocket	280 mm x 8 mm Stainless Steel
Mounting Gland	Brass, supplied with 3 mm NAF Gasket
Terminal Cover	IP55, Polycarbonate with 1off 25 mm and 1off 20mmConduit Entry
Standard Thermostats	20A S.P.B.O.R. Control Thermostat with a range of 5 - 85°C (Supplied)
Application	Suitable for light to medium oils, water and other liquids which will not react detrimentally with the materials of the element sheath and gland or be affected by the surface rating.
Optional Mounting Flange	100 mm OD x 15 mm available in M/Steel Pt No. 54F205 or S/Steel Pt No. 54F200
Spare Parts	Pt No. 66P165 - Gasket Pt No 52W196 - 5-85ºC Control Thermostat
Optional Thermostats	Pt No 52W205 - 20A S.P.B.O.R. Control Thermostat with a range of 0 - 55°C Pt No 52W199 - 20A S.P.B.O.R. Control Thermostat with a range of 60 - 120°C

SEDGBEER

Sedgbeer Limited. Unit 1, Reads Yard, Station Road, Wanstrow, BA4 4SY

Heater element for Poultryman wax reclaim tank